



**EQUIPMENT**

## **DRY CLEANING PECSOLV PL-453**



### **AVAILABLE OPTIONS**

- Built in air compressor
- Speedy dry sensor/dry control
- Global wash cleaning drum rear
- Automatic soap dosing pump
- Ice care: Solvent cooling refrigeration
- Water saving valve
- Drying of distillation waste
- Multisorb 30 system
- Microswitches and block in the service doors
- Air jet air filter cleaning
- Eco-waste cleaning pump system
- Safety solvent containment tank

### **STANDARD FEATURES**


- Wide front design
- Steam or electric heating
- Closed circuit and heat pump
- Computer programmer with manual override, diagnostic function and re-programmable: Fully programmed with standard Industry programs including multisorb & solvent level adjusting
- 1 ecofilter minimicron no flex-cleaning
- 3 tanks, self-cleaning glasses, independent, automatic
- Wash & dray phases have variable drum reversing
- Stainless steel water separator with inspection glasses
- Stainless steel monobloc air recovery with electrofan
- Transparent air filter with button trap inspection covers
- Double air filtration system
- Self-drying stainless steel basket on button trap
- Automatic additive injection
- Optimized thermal efficiency stainless steel still
- Continuous and temporary distillation
- Electronic inverter on drum basket for speed control
- Door open alarm, overload motor protection

# DRY CLEANING PECSOLV PL-453

## Technical Data

Load capacity	18-20 Kg
Drum dimensions (ØxP)	900 mm x 565 mm
Wash speed	40 RPM
Extract speed	350/450 RPM
Drum volume	360L (510 mm Door Ø)
Electric heating power	18.42 Kw
Steam heating power	10.92 Kw
Motor (kW)	1.5 (Wash) 1.1 (Fan) 0.55 (Pump) 0.37 (Filter) 2.6 (Refrig.)
Tank capacity	120L (1st) 120L (2nd) 160L (3rd)
Water (steam) pressure	1.5 Bar (4.5 Bar) *1/2" Connection
Machine dimensions (L x W x H)	1280 mm x 1130 mm x 1952 mm
Net weight	2100 Kg

## Detail & Dimensions

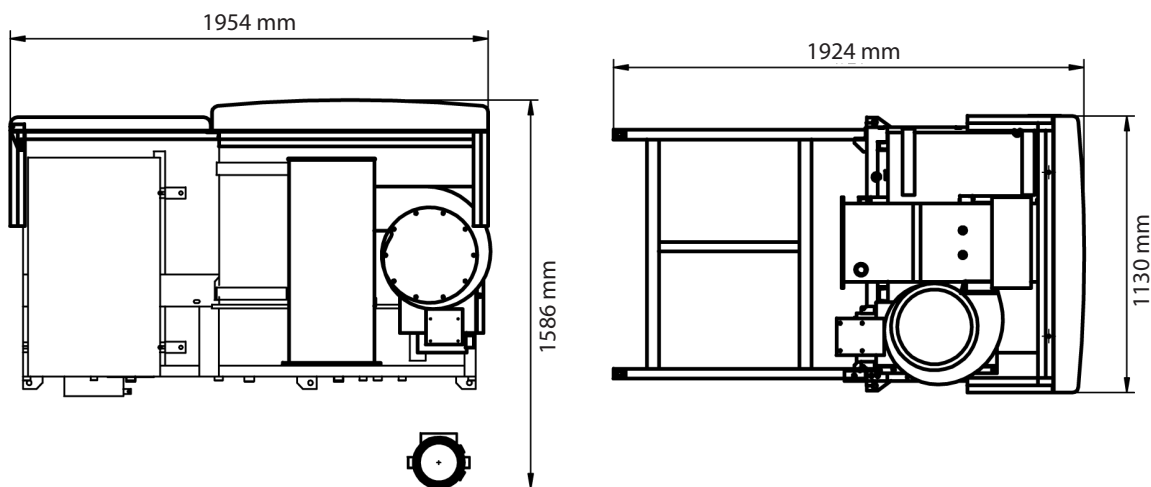

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



### POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlineequip.com](http://www.powerlineequip.com)